



DOWNLIGHT INSULATION GUARD

Patent Pending

**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION
LEAVE A COPY FOR THE USER / MAINTENANCE ENGINEER FOR FUTURE REFERENCE**

IMPORTANT INSTALLATION INFORMATION

- Building Regulations Part L, NHBC and other interested parties/insurers' require that loft insulation is laid unbroken over the whole ceiling area to avoid "thermal bridging" – i.e. the loss of heat through spaces in the insulation due to the fitment of luminaires.
- This downlight insulation guard is intended for the use of supporting insulation in loft spaces around recessed downlight luminaires in order to meet these requirements.
- This downlight insulation guard is suitable for installation in insulated loft voids where downlights being fitted into ceilings would otherwise penetrate the loft insulation and thereby preventing compliance in meeting the Building Regulations Part L.
- Installation should be carried out in accordance with the latest edition of the I.E.E. Wiring Regulations (BS7671) and taking into consideration the latest Building Regulations. If in doubt, consult a qualified electrician.
- Ensure that ALL electrical connections to the luminaire and associated equipment, which is to be housed within the downlight insulation guard, are tight with no exposed loose strands or contacts which could touch & short onto the downlight insulation guard.
- All luminaires run HOT. It is the installer's responsibility to consider any possible fire risks and take appropriate precautions associated with the installation.

IMPORTANT USER INFORMATION

- Always switch off mains supply to the luminaire and associated equipment before installation.
- Do not stand on or walk over the insulation guard – max. load is 20 Kgs.

GENERAL INSTALLATION

1. Unpack the insulation guard taking care of any sharp edges on the material. Use hand protection.
2. Lay the insulation guard flat ensuring the interlocking tab receptacle is in the upward position – see Fig 1.
3. Bend the four interlocking tabs up 90° – Fig 1.
4. Bend the adjacent sides up 90° – Fig 2.
5. Bend the sides with the tabs up 90°, ensuring the interlocking tabs are inserted into their receptacles on the adjacent sides- Fig 3.
6. Push together until the interlocking tabs lock into place – Fig 4.
7. The assembled insulation guard can now be fitted over the back of the luminaire in the loft void – Fig 5 in preparation for the installation of the loft insulation.
The luminaire must be positioned at least 50mm from the sides of the insulation guard. If a transformer, controller or ballast is used with the luminaire, this must be positioned outside the insulation guard, in a position not covered with the insulation and/or other materials. Please refer to the installation instructions for the transformer, ballast or controller.
8. The points on the sides will aid in gripping the insulation guard against the ceiling thus limiting any movement or disturbance, especially when the insulation is laid. However, care must still be taken to ensure the insulation guard remains in place.




Fig 1.




Fig 2.

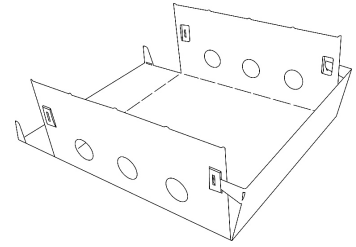


Fig 3.




Fig 4.

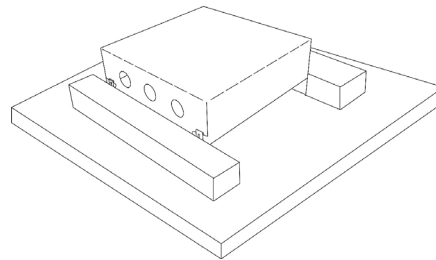


Fig. 5

Environmental Protection (W.E.E.E.) – Aurora's WEEE Reg.No. WEE/BG0130YX(UK Only)



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking (left) must not be disposed of with other household or commercial waste. Aurora does not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice. If, when you purchased any Aurora product, your supplier included a WEEE disposal fee, you should then contact your supplier for advice on his takeback of the product for the correct disposal.

WARRANTY

See www.auroralighting.com for full details of warranties and Extended Warranty Terms and Conditions. The warranty is invalid in the case of improper use, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Wiring Regulations. Should this product fail during the warranty period it will be replaced free of charge, this is subject to correct installation and return of the faulty product. Aurora does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Aurora reserves the right to alter specifications without prior notice.